## Insite Pacific Inc.

# Mini Zeus Mark III

**HIGH DEFINITION Color Zoom Camera** 

Insite Pacific introduces the Mini Zeus Mark III, a High Definition CMOS color zoom video camera. The camera has 2,130,000 pixels that can shoot high-definition images with superior picture quality. The images are clear, detailed, and true to life accurate. High Definition Television (HDTV) provides nearly five times more video information (2,130,000 pixels vs roughly 410,000 pixels) compared to standard definition TV systems.

The camera can be provided in a housing rated from 1,000 meters to 7,500 meters depth.

A glass hemispherical viewport and Insite Pacific's exclusive fully underwater corrected optical lens system corrects for chromatic and geometric distortion, astigmatism, as well as other optical abnormalities. Our proven corrected optical lens system also eliminates zoom and focus tracking errors.

The Mini Zeus Mark III has HD-SDI and 3G-SDI High Definition digital video outputs of 1080p/60, 1080p/59.94, 1080p/50, 1080p/29.97, 1080p/25, 1080i/60, 1080i/59.94, 1080i/50, 720p/59.94, 720p/50, 720p/29.97, and 720p/25 available from a single camera. Focus, iris, and zoom can be controlled via DC voltages, a GUI, or Insite Pacific's Camera/Lens Controller for maximum flexibilty.

Optionally a CWDM compatible 2.970 Gbit/s 3G-SDI electrical to fiber optic video converter mounted inside the pressure housing, along with a fiber optic connector mounted on the rear endbell, can provide transmission of the video signal for distances of up to 30Km on a fiber optic cable.

Insite Pacific's optional Camera/Lens Controller allows control of zoom, focus (auto/manual & near/far) and iris (auto/manual & open/close). The zoom is controlled by using a single axis rate control joystick, the focus by using a slide potentiometer for precise positional control, and the iris by using a rotary potentiometer. The various video outputs of the camera and white balance are selectable via the Control Unit. Communication between the hand control unit and the camera is selectable for either RS232 or RS485 comm's. Positional feedback from the camera for lens focus, iris, and zoom settings are available outputs of the control unit.



### **Features**

- 1080p / 1080i High Definition Video
- □ Super Wide 139 Degree Diagonal Angle of View
- 1,000 Meter to 7,500 Meter Depth Ratings
- ☐ HD: HD-SDI & 3G-SDI Digital Video Outputs
- Optional Fiber Optic HD-SDI & 3G-SDI Outputs
- ☐ Close Focus to Front of the Dome at Zoom Full Wide
- □ Close Focus of 8" (203mm) from the front of the Dome at Zoom Full Tele
- Glass Hemispherical Viewport with Insite Pacific's Exclusive Fully Corrected Optics


## **Applications**

- Offshore Oil & Gas Industries
- Underwater Documentaries
- High Resolution Inspection In Restricted

Access Areas

- Marine Archaeology
- Oceanographic Research
- Military

# Insite Pacific - Mini Zeus Mark III

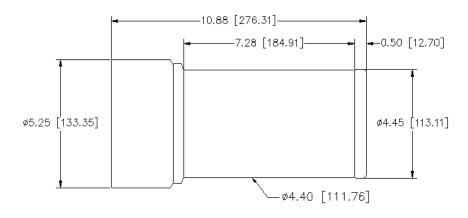

### Specifications:

#### **Electrical**

**Sensor:** 1/2.8-inch Exmor CMOS **Minimum Illumination:** 0.0013 lx (1/4 sec (1/3 sec), 50%

High Sensitivity mode On)

**HD-SDI & 3G-SDI HD Digital Video Formats:** 1080p/60, 1080p/59.94, 1080p/50, 1080p/29.97, 1080p/25, 1080i/60, 1080i/59.94, 1080i/50, 720p/59.94, 720p/50, 720p/29.97, 720p/25

Focus / Zoom / Iris: Remote control
Focus Range (At full telephoto): 8" (203mm) to infinity
Focus Range (At full wide): Front of the dome to infinity
Camera Power: 15-30 Vdc, 300 mA nominal
Iris Range: F1.6 to Closed
Lens: 4.3mm to 129mm, 30X Zoom lens

Angle of view In water	4.3mm (Wide angle)	129mm (Telephoto)
Diagonal	139.4°	6.8°
Horizontal	134.0°	6.4°
Vertical	105.9°	3.6°

#### **Environmental**

**Depth:** 1,000 to 7,000 meter pressure housings available **Operating Temperature:**  $-5^{\circ}\text{C}$  (23°F) to 60°C (140°F) **Storage Temperature:**  $-20^{\circ}\text{C}$  ( $-4^{\circ}\text{F}$ ) to 60°C (140°F)

All dimensions in inches [millimeters]

#### Mechanical

Dimensions above are for the 6km 3G-SDI electrical camera

Weight In Air:

Weight In Water:

Housing Material:

Viewport:

(Optically Polished, Water Corrected)

Connector:

15.5 lbs. (7.03 kg)

9.0 lbs. (4.08 kg)

6AL / 4V Titanium

Hemispherical Glass
(Optically Polished, Water Corrected)

Customer specified



### CAMERA CONTROL UNIT

All specifications are subject to change in line wiith Insite Pacific's policy of continual product development.

## INSITE PACIFIC Inc.

6837 Nancy Ridge Drive, Suite G, San Diego, California, 92121, USA Phone (858) 523-0642 Fax (858) 523-0643

Website: www.insitepacific.com Email: sales@insitepacific.com